

Important Notice

Before you upgrade the new firmware, please make sure the IE version is suitable.

Version 3.09.14 and earlier are working on **IE 6.0 SP2 and IE 7.0 only**, not support IE 8.0 or other browser.

If you upgrade from 3.08.08 or earlier, do not upgrade directly to 3.10.22.

Please complete upgrade to 3.09.14 first, then upgrade to 3.10.22.

Firmware Before Upgrading	Upgrade Path
3.08.08 or earlier	First upgrade to 3.09.14 → then upgrade to 3.10.22. Warning: Do not upgrade directly to 3.10.22. Device will show error message “Firmware Version Mismatch”, and upgrade will not complete.
3.09.14	Upgrade to 3.10.22 directly

Click [Here](#) to download the **Firmware V3.10.22** directly.

Click [Here](#) to download the **IP Utility 3.5.20** directly.

Click [Here](#) to download the **Profile** directly.

Click [Here](#) to find out all our products.

Click [Here](#) to find out all our software.

NOTE: We enhance video quality for the following products

Reference - Mapping Table of Cameras and New Profiles

Profile	Camera
MT9M131-RA0_VyymmddA	ACM-4200, ACM-4201, ACM-5601
MT9M131-RA5_VyymmddA	ACM-3401
MT9M131-RA8_VyymmddA	ACM-8201
MT9M131-RA9_VyymmddA	ACM-3701, 3703
MT9M131-RB0_VyymmddA	ACM-5611, AMU-9411
MT9M131-RB1_VyymmddA	ACM-1231, ACM-1232, ACM-7411, ACM-1511, ACM-3511
MT9M131-RB2_VyymmddA	ACM-1231, ACM-1232, ACM-7411, ACM-1511, ACM-3511,
MT9M131-RB5_VyymmddA	ACM-3411,
MT9M131-RB8_VyymmddA	ACM-8211
MT9M131-LA0_VyymmddA	ACM-4000, ACM-5001, ACM-4001
MT9M131-LA5_VyymmddA	ACM-3001
MT9M131-LA6_VyymmddA	ACM-3601, ACM-3603
MT9M131-LB1_VyymmddA	ACM-1011, ACM-3011
MT9M131-LB2_VyymmddA	ACM-1011, ACM-3011
MT9M131-TA0_VyymmddA	TCM-4301


Please follow the procedure to upload the profile.

- Step 1 Please click [Here](#) to download the **Profile** directly, then decompress the zip file and save the profile pack "CameraProfile_V091106A.bin" into your drive.

Please open your browser and type the link to connect to camera. (Our camera default USER is "Admin", PWD is "123456", if you already change the camera HTTP port, login account, please use right setting for all steps)


http://camera_ip_address:port/cgi-bin/update?USER=Admin&PWD=123456&PROFILE_PACK

After you press [Enter] key, you will see the query box

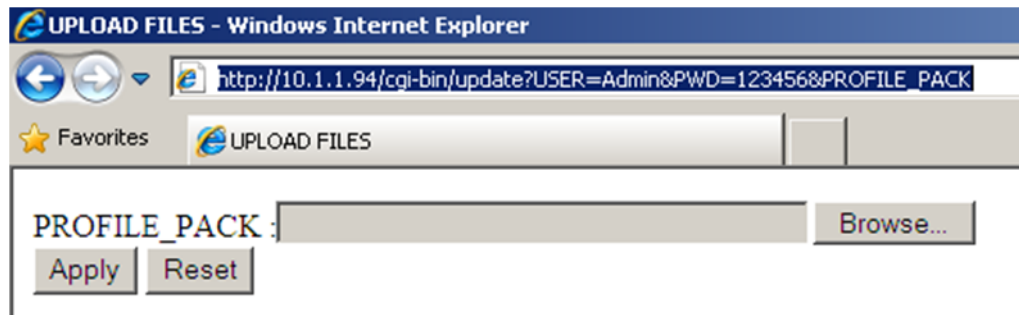

The screenshot shows a browser window titled "UPLOAD FILES - Windows Internet Explorer". The address bar contains the URL: http://10.1.1.94/cgi-bin/update?USER=Admin&PWD=123456&PROFILE_PACK. Below the address bar, there is a form with a label "PROFILE_PACK:" followed by a text input field. To the right of the input field is a "Browse..." button. Below the input field are two buttons: "Apply" and "Reset".


- Step 2 Click the "Browser" to select the "CameraProfile_v091106A.bin"
After you press "Apply", you will see "OK" message on the screen.

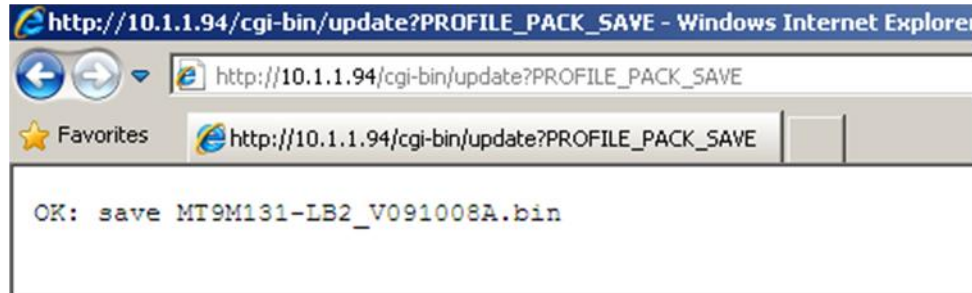

- Step 3 Please do the factory to default since our firmware will keep user pervious camera page settings

http://camera_ip_address:port/cgi-bin/update?USER=Admin&PWD=123456&FACTORY_DEFAULT

After you press [Enter] key , you will see "OK" message

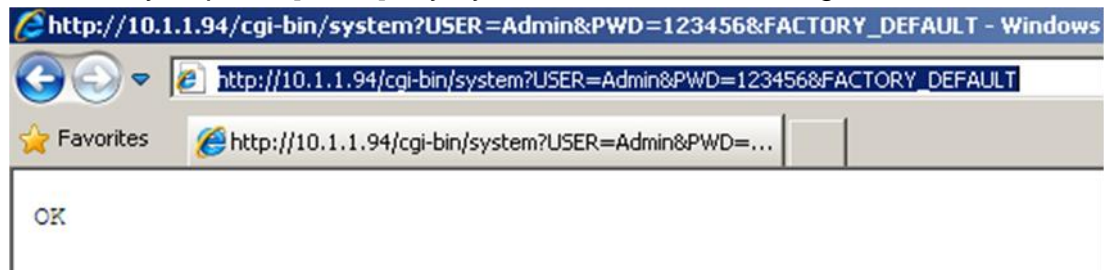

- Step 4 Then please save and reboot the camera

http://camera_ip_address:port/cgi-bin/update?USER=Admin&PWD=123456&SAVE_REBOOT

After you press [Enter] key, you will see "OK" message and the device will reboot automatically.

